

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02
 DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1
 REV. 00 - 17/06/2015

WEIGHT






C1D_40E

Power clamp


European std

40 mm bore


With manual operation

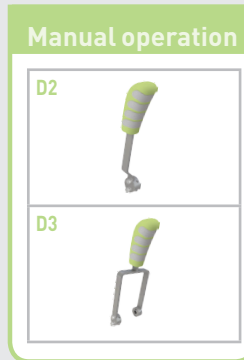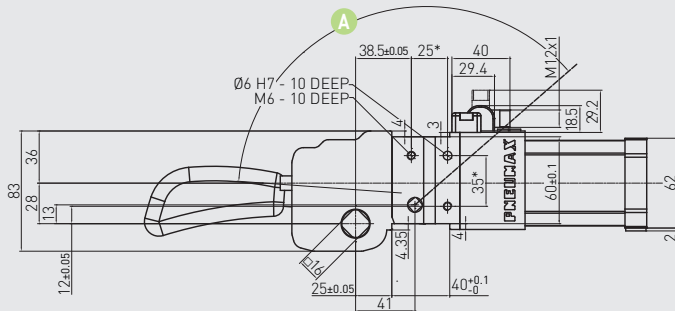


D1 VERSION

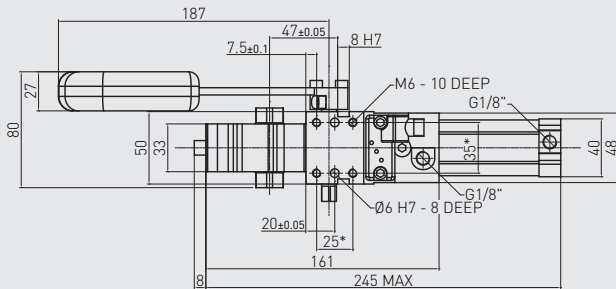

D2 VERSION



D3 VERSION



Handle swivel angle


Arm opening angle	Handle swivel angle A
0°	4.12°
15°	22.65°
30°	38.2°
45°	58.4°
60°	83.6°
75°	107.6°
90°	123.6°
105°	132.75°
120°	137.7°
135°	140°

Subject to change without notice







CLAMPING ARMS

16 mm shaft



Aluminum

Steel

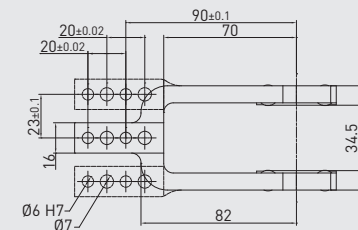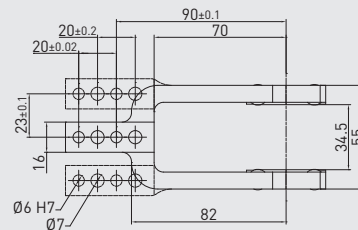

16 mm shaft – 15 mm offset



PART NO.	MATERIAL	VERSION	WEIGHT (kg)	MAX OP. ANGLE POS. 1	MAX OP. ANGLE POS. 2	MAX OP. ANGLE POS. 3	MAX OP. ANGLE POS. 4
B1601	Aluminum	Central	0.24	135°	135°	N/A	45°
Q1601	Steel	Central	0.44	135°	135°	N/A	45°
B1602	Aluminum	Right	0.24	135°	135°	N/A	45°
Q1602	Steel	Right	0.46	135°	135°	N/A	45°
B1603	Aluminum	Left	0.24	135°	135°	N/A	45°
Q1603	Steel	Left	0.46	135°	135°	N/A	45°

Screws: M6x20 Tightening torque: 10 N m

16 mm shaft – 45 mm offset



PART NO.	MATERIAL	VERSION	WEIGHT (kg)	MAX OP. ANGLE POS. 1	MAX OP. ANGLE POS. 2	MAX OP. ANGLE POS. 3	MAX OP. ANGLE POS. 4
B1604	Aluminum	Central	0.3	135°	135°	N/A	N/A
Q1604	Steel	Central	0.55	135°	135°	N/A	N/A
B1605	Aluminum	Right	0.3	135°	135°	N/A	N/A
Q1605	Steel	Right	0.57	135°	135°	N/A	N/A
B1606	Aluminum	Left	0.3	135°	135°	N/A	N/A
Q1606	Steel	Left	0.57	135°	135°	N/A	N/A

Screws: M6x20 Tightening torque: 10 N m

Subject to change without notice